




ENGINEERING PARQUET



THE PARQUET MANUFACTURER

For over 20 years we have been producing the highest quality natural wood flooring products for Europe, North America, Central Asia and the CIS countries.

Producing more than 450,000 square meters of parquet per year, we care about naturalness and natural aesthetics of home comfort.



From raw material to finishing

Harvesting of oak wood

We check each tree for compliance with the requirements before harvesting.

Plywood production

Plywood is produced in the factories of the PFKS Group.

Finishing materials

The materials are carefully selected and tested in our own laboratory.

Quality control

Comprehensive quality control at all stages of production in accordance with European standards.

Finishing materials

FINISHING TECHNOLOGIES AND MATERIALS

Natural linseed oil

Oxidative oil and UV oil preserve the natural characteristics and the natural texture of wood, giving it all the necessary protective properties.

Smoking

The process of chemical treatment of wood gives the wood a darker and more unique grain and further highlights its texture.

Brushing

Mechanical removal of all soft wood tissues from the face side. It gives resistance to mechanical damages, adds visual volume.



FINISHING WITHOUT BRUSHING

— #0 —




— #37 —




— #72 —



— #67 —

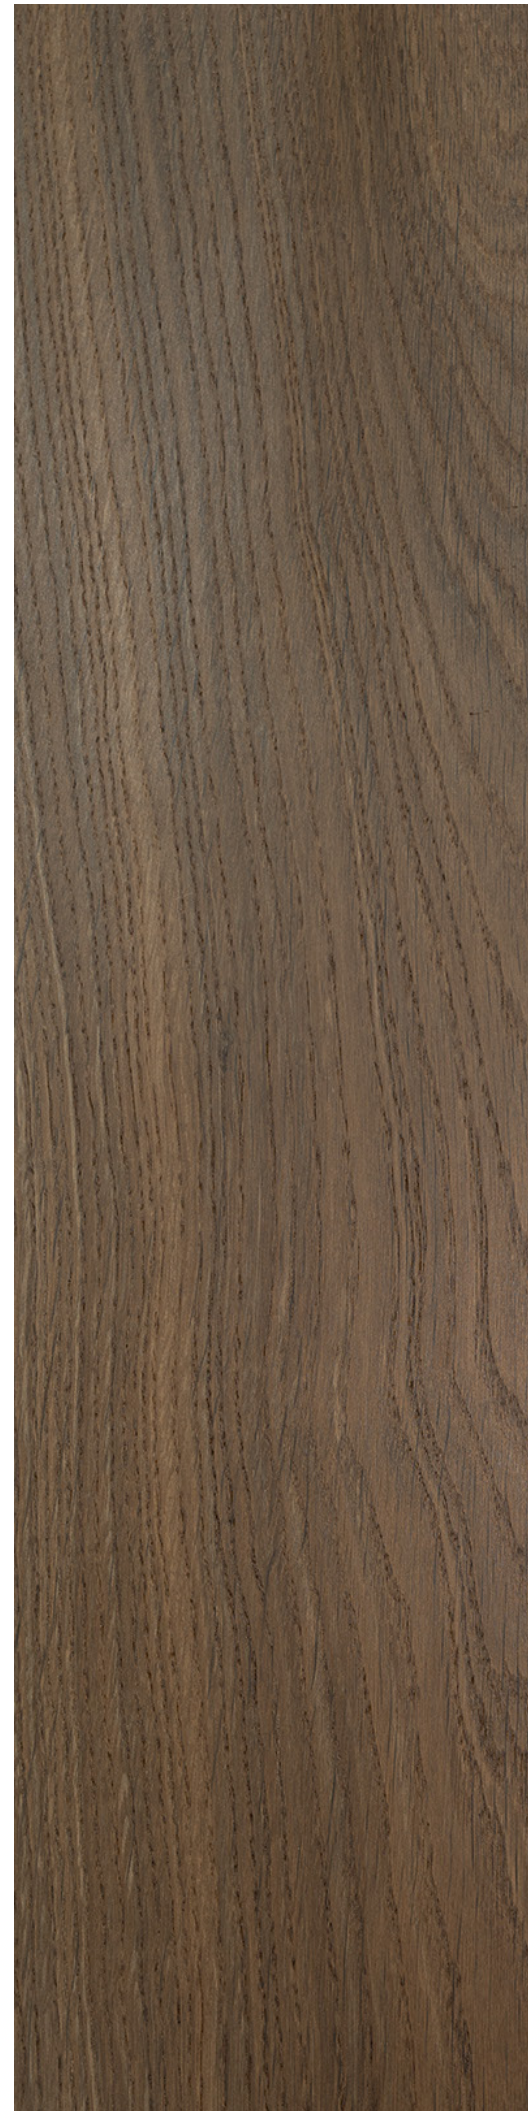

— #7 —

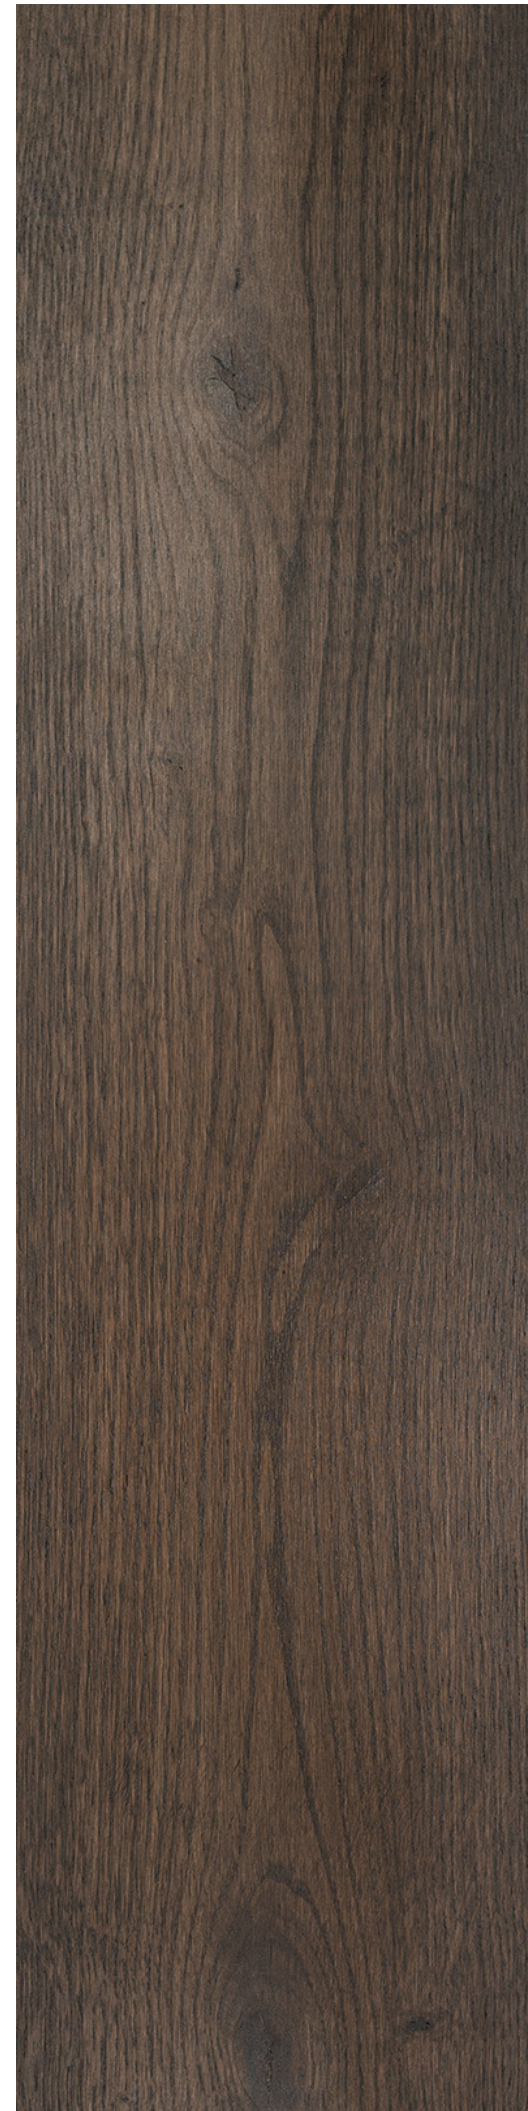

— #66 —



SOFT BRUSHED FINISHING

— #43 —



— #76 —



— #77 —



— #78 —



— #81 —



— #13 —



SOFT BRUSHED FINISHING

— #44 —



— #40 —



— #82 —



— #36 —



— #45 —



— #27 —



SOFT BRUSHED FINISHING

— #18 —



— #10 —



— #8 —



— #9 —



— #4 —



— #2 —



DEEP BRUSHED FINISHING

— #59 —



— #62 —




— #64 —



— #74 —



— #56 —

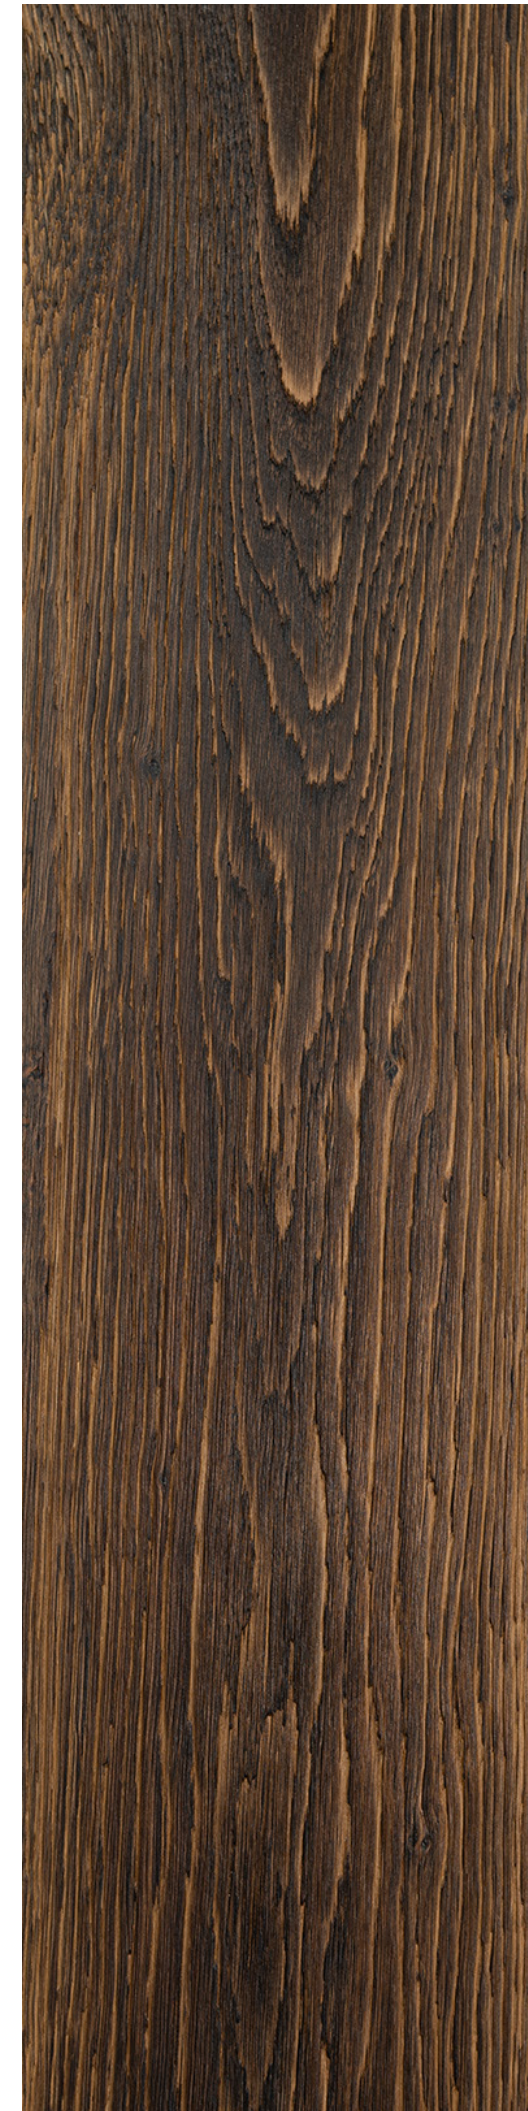

— #57 —



Boards laying

ENGINEERED FLOORS

Dimensions

Width: 100 to 280 mm

Length: 600 to 2 800 mm

Height: 12, 15 mm



Dimensions

Angle: 45 to 60 degrees

Width: 100 to 200 mm

Length: 600 to 1 200 mm

Height: 12, 15 mm




100/120/140/160/180/200 mm

12/15 mm

Herringbone

CHEVRON

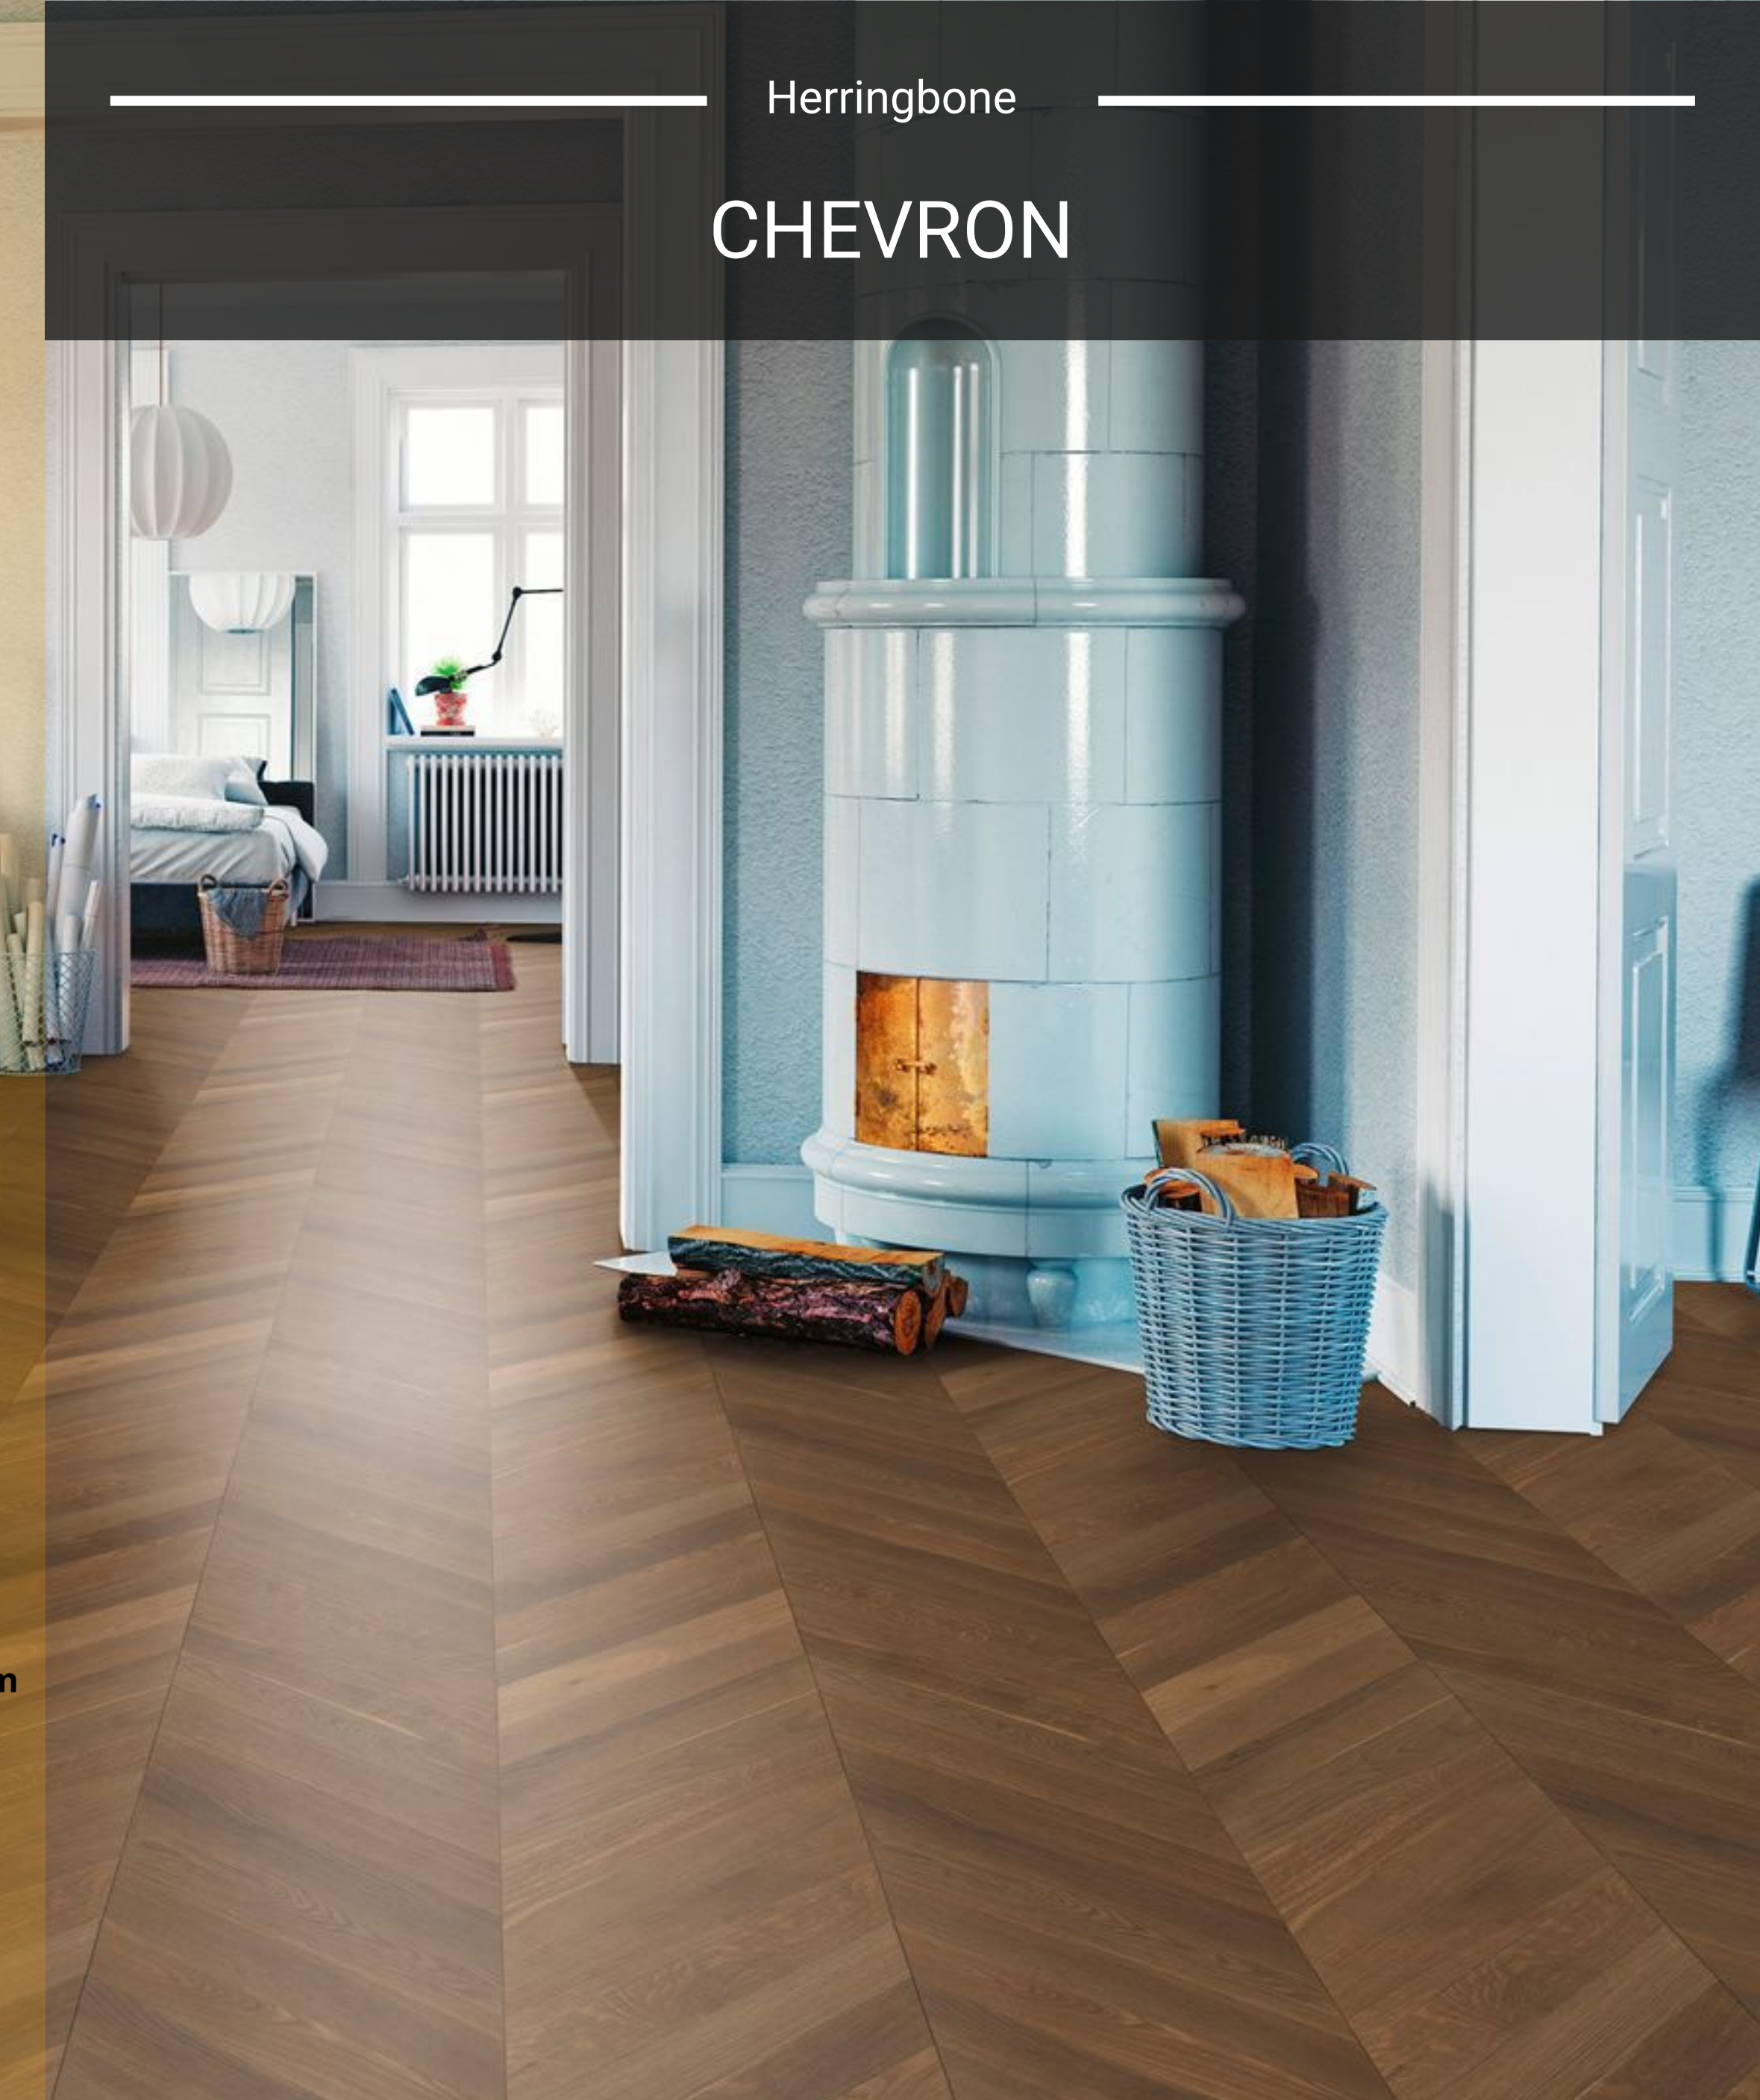

Dimensions

Width: 100 to 200 mm

Length: 600 to 1 200 mm

Height: 12, 15 mm



Herringbone

HERRINGBONE 90°

100/120/140/160/180/200 mm

12/15 mm



GRADE SELECT

GRADE NATUR

GRADE MARKANT

GRADE RUSTIC

- Knots: not allowed
- Pin knots: single, up to Ø5 mm
- Sapwood: not allowed
- Cracks: not allowed

- Knots: single up to Ø20mm
- Pin knots: up to Ø5mm
- Sapwood: not allowed
- Cracks: up to 2mm wide, prefilled

- Knots: up to Ø40mm
- Pin knots: not limited
- Sapwood: no more than 10mm wide
- Cracks: up to 1/5 length, prefilled

- Knots: not limited
- Pin knots: not limited
- Sapwood: no more than 10mm wide
- Cracks: up to 1/3rd of the length, prefilled

The characteristics of the grade relate to the upper layer of the board, the lamella. Each grade defines a degree of display of different features of the wood on a board - sapwood (light longitudinal strips), knots, contrast in tone. The pattern and the price of the board also depend on the grade - the more homogeneous the natural pattern, the higher the value and the price of the engineered floors.



E-mail

info@akyzemin.com



Tel

+90 216 325 22 59

